
Auto Reset / Battery Backup / Auxiliary Contacts

VERSA'LARM™- Sump Alarm

Leading Edge Design







A standard Versa'larmTM - Sump Alarm includes an alarm panel and a WaterSpotterTM Probe sensor. The sensor may be up to 2,500 feet from the Versa'larm. Receive immediate notification of threatening water levels by connecting an Auto Dialer to the Versa'larm. The Auto Dialer will call four contact numbers when an alarm occurs. Install a standard 9 volt battery to ensure the system will operate during power outages or accidental unplugging of the unit. Once the standard Versa'larm - Sump Alarm is installed, add accessories to create a total "Home Protection System." Add up to six WaterSpottersTM for complete property protection. Add the low temperature switch option with an Auto Dialer and get Furnace Failure notification while away from home.

Stand-Alone Alarm


Call your neighbor


Install the standard Versa'larmTM - Sump Alarm

(Includes one Versa'larmTM and one WaterSpotterTM Probe)

Typical Applications:

A standard alarm may be all that you need. Expand at any time if you want additional coverage, simply add accessories for customized protection.



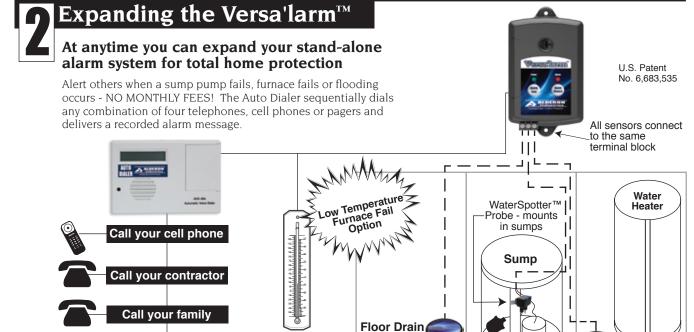



Receive warning of

furnace failure before water pipes freeze.

Auto Reset / Battery Backup / Auxiliary Contacts

VERSA'LARM™- Sump Alarm

Specifications



WaterSpotter™Probe

Voltage 9-12 VDC


Caution

Connect only to an Alderon Versa'larm™ monitoring system

Operating Current 3 mA

Switching Current 500 mA maximum

Probes



Features

Unique Installation

Perfect for small basins or confined spaces, will not tangle up or interfere with sump pump

Stainless Steel Probes

Resist rust and corrosion

Solid State Circuitry

No moving parts, no maintenance

Epoxy-Encapsulated Circuit

Waterproof-tamperprooftrouble free

Easy Mount Enclosure

Probes extend through I" hole in basin cover or strap to the discharge pipe

3-year Warranty

VERSA'LARM™

Primary Power 120 VAC, 60 Hz

Secondary Power

Class 2, 9-11 VDC, 500 mA

Auxiliary Contacts

Normally Open

Class 2, 24 VDC/24 VAC (50/60Hz), 100 mA maximum

Battery


Standard 9 VDC (not included)

Buzzer

103 db @ 2 ft

Switch

9 VDC, 200 mA minimum (Signaling device) Single pole, single throw



Features

LED Light & Buzzer

Excellent audio/visual in poor conditions

Test/Silence Switches, Automatic Buzzer Reset

Guarantees alarm

Battery Backup

Protection during power outages

Alarm Auxiliary Contacts

Connect to Auto Dialers Remote alarms

Connect Up to Six WaterSpotter TM Sensors

Flexibility for zone protection

Type 1 Enclosure with External Mounting Flange

Mounts in minutes

Indicator Lights

Indicates power and alarm status

CSA Listed / 3-Year Warranty

United States and Canada Guaranteed Safety and Performance

Order Numbers



Versa'larm™



WaterSpotter™



WaterSpotter™ Probe



Furnace Fail



Auto Dialer

Part	
Number	Description
7002	Versa'larm TM - Sump Alarm (includes WaterSpotter TM Probe)
Accessories (Expanded Applications)	
7008	WaterSpotter™ (Flood Sensor)
7009	WaterSpotter™ Probe (Sump Sensor)
7018	Low Temperature Sensor (need to order 7006 or 7019 also)
7006	Auto Dialer: one common message used for all sensors
7019	Auto Dialer: two different messages, one for water sensor and one for furnace fail



Leading Edge Control Products

CS1002A