### Auto Reset / Battery Backup / Auxiliary Contacts

# **VERSA'LARM™- Flood Alarm**

# Leading Edge Design





### Early Warning - Notification While You're Away - Power Outages - Expandable

A standard Versa'larm<sup>TM</sup> - Flood Alarm includes an alarm panel and a WaterSpotter<sup>TM</sup> sensor. The sensor may be up to 2,500 feet from the Versa'larm where water needs to be detected. Receive immediate notification of threatening water levels by connecting an Auto Dialer to the Versa'larm. The Auto Dialer will call four contact numbers when an alarm occurs. Install a standard 9 volt battery to ensure the system will operate during power outages or accidental unplugging of the unit. Once the standard Versa'larm - Flood Alarm is installed, add accessories to create a total "Home Protection System." Add up to six WaterSpotters<sup>TM</sup> for complete property protection. Add the low temperature switch option with an Auto Dialer and get Furnace Failure notification while away from home.

## Stand-Alone Alarm

### Install the standard Versa'larm™ - Flood Alarm

(Includes one Versa'larm<sup>TM</sup> and one WaterSpotter<sup>TM</sup>) A standard alarm may be all that you need. Expand at any time if you want additional coverage, simply add accessories for customized protection.

### **Typical Applications:**


Floor Drain - Water Heater - Laundry Room - Sink/Dishwasher Office/Computer Room - Utility Room



# Expanding the Versa'larm $^{ exttt{ iny }}$

### At anytime you can expand your stand-alone alarm system for total home protection

any combination of four telephones, cell phones or pagers and delivers a recorded alarm message.

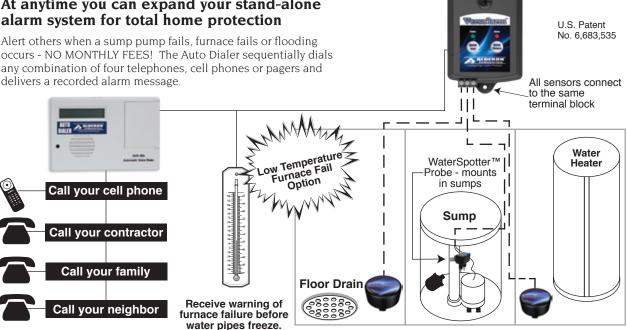



### **Auto Reset / Battery Backup / Auxiliary Contacts**

# **VERSA'LARM™- Flood Alarm**

# **Specifications**



### **WaterSpotter™**

## **Voltage** 9-12 VDC

#### Caution


Connect only to an Alderon Versa'larm<sup>TM</sup> monitoring system

Operating Current 3 mA

**Switching Current** 500 mA maximum

### **Probes**

Stainless steel



### **Features**

### **Thin Film Water Detection**

Less than 1/16 inch, for early warning before damage occurs

#### **Solid State Circuitry**

No moving parts, no maintenance

### **Epoxy-Encapsulated Circuit**

Waterproof-tamperproof-trouble free

### **Stainless Steel Probes**

Resist rust and corrosion

## **Easy Mount Enclosure**Mounts on flat surfaces

3-year Warranty

### VERSA'LARM<sup>™</sup>

### Primary Power 120 VAC, 60 Hz

### Secondary Power

# Class 2, 9-11 VDC, 500 mA Auxiliary Contacts

Normally Open

Class 2, 24 VDC/24 VAC (50/60Hz), 100 mA maximum

### **Battery**

Standard 9 VDC (not included)

#### Buzzer

103 db @ 2 ft

#### Switch

9 VDC, 200 mA minimum (Signaling device) Single pole, single throw



### **Features**

### LED Light & Buzzer

Excellent audio/visual in poor conditions

#### Test/Silence Switches, Automatic Buzzer Reset

Guarantees alarm

#### **Battery Backup**

Protection during power outages

### **Alarm Auxiliary Contacts**

Connect to Auto Dialers Remote alarms

# Connect Up to Six Waterspotter™ Sensors

Flexibility for zone protection

# Type 1 Enclosure with External Mounting Flange

Mounts in minutes

#### **Indicator Lights**

Indicates power and alarm status

#### **CSA Listed / 3-Year Warranty**

United States and Canada

Guaranteed Safety and Performance

### **Order Numbers**



**Versa'larm**™



WaterSpotter™



**WaterSpotter™ Probe** 



**Furnace Fail** 



**Auto Dialer** 

Part	
Number	Description
7003	Versa'larm™ - Flood Alarm (includes WaterSpotter™)
Accessories (Expanded Applications)	
7008	WaterSpotter™ (Flood Sensor)
7009	WaterSpotter™ Probe (Sump Sensor)
7018	Low Temperature Sensor (need to order 7006 or 7019 also)
7006	Auto Dialer: one common message used for all sensors
7019	Auto Dialer: two different messages, one for water sensor and one for furnace fail



Leading Edge Control Products

CS1003A